


<p>(51) International Patent Classification ⁶ : H04M 3/00</p>	<p>A2</p>	<p>(11) International Publication Number: WO 97/50230</p> <p>(43) International Publication Date: 31 December 1997 (31.12.97)</p>						
<p>(21) International Application Number: PCT/US97/10987</p> <p>(22) International Filing Date: 24 June 1997 (24.06.97)</p> <p>(30) Priority Data:</p> <table border="0"> <tr> <td>60/020,059</td> <td>24 June 1996 (24.06.96)</td> <td>US</td> </tr> <tr> <td>Not furnished</td> <td>20 June 1997 (20.06.97)</td> <td>US</td> </tr> </table> <p>(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).</p> <p>(72) Inventors: BJORKMAN, Jan; S-Stockholm (SE). NYMAN, Anders; S-Stockholm (SE). BERGSTROM, Ingvar; S-Stockholm (SE). DINHA, Francis; S-Stockholm (SE). MELEN, Bjorn; FIN-Helsinki (FI).</p> <p>(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).</p>		60/020,059	24 June 1996 (24.06.96)	US	Not furnished	20 June 1997 (20.06.97)	US	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>Without international search report and to be republished upon receipt of that report.</i></p>
60/020,059	24 June 1996 (24.06.96)	US						
Not furnished	20 June 1997 (20.06.97)	US						

(57) Abstract

A telecommunications switch is provided with an internal ethernet link which is connected to a group switch/time switch portion of the switch through a number of interface processors. The group switch/time switch portion functions to switch data communications among and between the subscriber lines, trunk lines and the interface processors. The ethernet link serves as a concentrator for packet data communications carried over the subscriber/trunk lines and handled by switch. The interface processors operate to selectively insert and extract packet data communications to and from the ethernet link. A connection is made via the ethernet link to an Internet access point to allow concentrated data packet communication with the Internet.

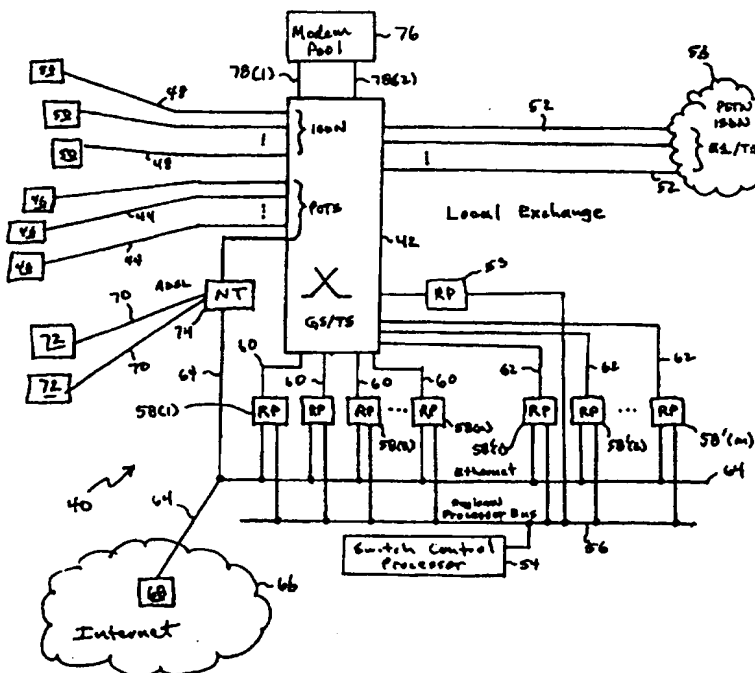

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**TELECOMMUNICATIONS SWITCH INCLUDING
AN INTEGRATED INTERNET ACCESS SERVER**

CROSS-REFERENCE TO RELATED APPLICATION

5 This Application for Patent claims priority from, and incorporates by reference the disclosure of, co-pending U.S. Provisional Application for Patent Serial No. 60/020,059, filed June 24, 1996.

10 BACKGROUND OF THE INVENTION

Technical Field of the Invention

 This disclosure relates to telecommunications switches and, in particular, to the use of a telecommunications switch to provide Internet
15 communications access and services.

Description of Related Art

 There is a tremendous amount of interest these days in acquiring access to both the Internet and Internet related services. The most common mechanism used by
20 persons to access the Internet is to contract with an Internet service provider through whom a communications connection to the Internet is obtained. Typically this connection is accomplished through the use of the existing public switched telephone network (PSTN). The person
25 desiring Internet access; and who also subscribes to an Internet service provider, simply uses his or her computer (with a modem, if necessary) to call the Internet service provider, with that call then being routed through the public switched telephone network and the communications
30 functionality of the service provider to an Internet access point (edge router).

-2-

It is well known, however, that data communications in general, and Internet type communications in particular, are wasteful of the limited communications resources of the telecommunications network. This is because the public switched telephone network comprises a circuit switched network, and thus each telecommunications connection between a person and their Internet service provider requires a separate physical communications link. Furthermore, this reserved connection must be maintained throughout the length of the call even though the data comprising the carried communication passes over the link on an infrequent basis. In fact, tens of seconds, if not minutes, may pass between subsequent data communications over the reserved circuit switched connection. This is because minor amounts of time are needed to convey the data, while relatively substantial amounts of time are expended in on-line human review of the conveyed information. It would be preferred if the telecommunications connections over the public switched telephone network carrying data communications could be more efficiently utilized. Such improved efficiency has application not only in providing users with telecommunications connections to their respective Internet service providers, but also in facilitating data communications between persons over the public switched telephone network itself.

SUMMARY OF THE INVENTION

Concentration of packet data communications handled by a telecommunications switch is effectuated by routing the packet data communications received from multiple

-3-

sources (such as subscriber lines or trunk connections) onto a switch supported ethernet link. From the ethernet link, a direct connection may be made to an Internet access point edge router to support Internet access.

5 Alternatively, the ethernet link concentrated data communications may be extracted back through the switch for communication over any number of different links (such as subscriber lines or trunk connections) to support inter-subscriber data communications.

10 In particular, data communications are routed through a group switch/time switch portion of the telecommunications switch between subscriber lines (such as plain old telephone service (POTS) lines, or integrated services digital network (ISDN) lines) and a first
15 plurality of regional processors. These first regional processors function to insert and extract subscriber data communications to and from the ethernet link. Similarly, data communications are routed through the group switch/time switch portion between trunk connections and
20 a second plurality of regional processors. These second regional processors also function to insert and extract subscriber data communications to and from the ethernet link. The first and second regional processors perform any protocol conversions necessary for the data
25 communications to be concentrated onto and carried by the ethernet link.

A direct connection for the data communications is provided via the ethernet link to the Internet through an Internet access point edge router. This allows data
30 communications to be efficiently routed to the Internet with minimal wasting of valuable communications resources

- 4 -

(such as trunk connections). The routing of subscriber data communications through the ethernet link further supports concentrated data communication over the trunk connections also with minimal wasting of valuable communications resources (such as individual subscriber circuit connections).

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram of a public switched telephone network;

FIGURE 2 is a schematic diagram illustrating conventional operation of a local exchange in the handling of a plurality of data communications;

FIGURE 3 is a block diagram of a local exchange including an integrated access server functionality of the present invention;

FIGURE 4 is a simplified block diagram of the regional processors;

FIGURE 5 illustrates the use of the local exchange including an integrated access server functionality; and

FIGURE 6 is a schematic diagram illustrating operation of the local exchange in the handling of a plurality of data communications.

DETAILED DESCRIPTION OF THE DRAWINGS

Reference is now made to FIGURE 1 wherein there is shown a block diagram of a public switched telephone

-5-

network (PSTN) 10 providing a data communications connection between a first user 12 and their Internet service provider 14, and between the first user and a second user 16. The public switched telephone network
5 comprises a plurality of local exchanges (LE's) 18 and a plurality of transit exchanges (TE's) 20. The local exchanges 18 and transit exchanges 20 are interconnected with each other by trunk lines 22. The trunk lines 22 also provide interconnections between the local exchanges
10 18 themselves, and between the transit exchanges 20 themselves. Each local exchange 18 is also connected to a plurality of subscribers via subscriber lines 24. Although only three subscribers comprising the users 12 and 16 and the Internet service provider (ISP) 14 are
15 shown, it will be understood that many more subscriber connections are supported at each local exchange 18.

Suppose the first user (U1) 12 desires to access the Internet 26. A call is placed by the first user 12 to the telephone number of the Internet service provider 14. The
20 call connection 28 (illustrated in bold) established by the public switched telephone network 10 passes through at least the local exchanges 18(1) and 18(2) and perhaps one or more of the other local exchanges 18 as well as perhaps one or more of the transit exchanges 20 (like
25 exchange 20(1)). Once established, the Internet service provider 14 through connects the call to an access point (comprising an edge router) 30 of the Internet 26.

A similar connection 32 (also illustrated in bold) for data communication is established when the first user
30 12 and second user (U2) 16 desire to engage in a data communications over the public switched telephone network

-6-

10. A call is placed from one of the users to the other. The established connection 32 passes through at least the local exchanges 18(1) and 18(3) and perhaps one or more of the other local exchanges 18 as well as perhaps one or more of the transit exchanges 20 (like exchange 20(2)).

Because the public switched telephone network 10 comprises a circuit switched (as opposed to a packet switched) network, the connection 28 is reserved solely to handle the call between the first user 12 and the Internet service provider 14, and the connection 32 is reserved solely to handle the call between the first user 12 and the second user 16. This constitutes a waste of the available communications resources provided by the connections 28 and 32 because those connections must be constantly maintained throughout the respective calls even though the data communications carried thereby occur on only a relatively infrequent basis.

The foregoing may be better understood by reference to FIGURE 2 wherein there is shown a schematic diagram illustrating conventional operation of the local exchange 18 in the handling of a plurality of data communications. The local exchange 18 includes a group switch/time switch (GS/TS) 34 which functions to connect any one of the subscriber lines 24 to any one of the trunk lines 22. Thus, if n users connected to the subscriber lines 24 desire to engage in data communications, the switch 34 reserves and makes n corresponding connections to n trunk lines 22. Each user data communication comprises a plurality of data packets 36 (graphically illustrated by tick marks on the communications lines). FIGURE 2 illustrates with respect to the user data communications

-7-

over the subscriber lines 24 and trunk lines 22 that only a small amount of the reserved connect time for each data communication is used in actually transmitting data packets 36. A significant amount of unused (i.e., dead) time 38 between packet 36 transmissions wastefully occurs with respect to each data communication. This resource waste is not so much of a significant problem with respect to use of the subscriber lines 24. It is, however, a significant concern with respect to use of the trunk lines 22 which could instead be used for carrying user voice communications (and perhaps other data communications). There is a need then for concentrating the data communications carried by the trunk lines 22. Such a concentration of the packets 36 would result in a utilization of fewer trunk lines 22 to carry the same amount of user data communications, and would also result in the transmission of those communications with reduced instances of unused time 38.

Reference is now made to FIGURE 3 wherein there is shown a block diagram of a local exchange 40 including an integrated access server functionality. The local exchange comprises a standard Ericsson AXE-type switch including a group switch/time switch (GS/TS) 42 which is connected to users 46 via a plurality of plain old telephone service (POTS) connection lines 44, as well as connected to users 50 via a plurality of integrated services digital network (ISDN) 2B+D connection lines 48. The group switch/time switch 42 is further connected to a plurality of E1/T1 trunk connections 52 through which a communications interconnection is made to other local exchanges as well as to transit exchanges over the public

switched telephone network and/or integrated services
digital network (PSTN/ISDN) 53. The group switch/time
switch 42 of the local exchange 40 has a configuration and
operation well known in the art for selectively
5 interconnecting certain selected ones of the plain old
telephone service connection lines 44 and/or integrated
services digital network connection lines 48 to certain
selected ones of the E1/T1 trunk connections 52. Control
10 over the operation of the group switch/time switch 42 in
making the foregoing selected interconnections is
effectuated by a regional processor (RP) 53 under the
command of a central switch control processor 54. A
regional processor control bus 56 carries the signaling
15 between the switch control processor 54 and regional
processor 53 necessary to control group switch/time switch
42 operation.

The local exchange 40 further includes a plurality
of additional regional processors used in providing the
integrated access server functionality. A first plurality
20 of the regional processors 58(1), 58(2), ..., 58(n) are
connected via DL2 interface connections 60 to the group
switch/time switch 42, and are connected to the switch
control processor 54 via the regional processor control
bus 56. Responsive to instructions issued by the switch
25 control processor 54, data communications may be
selectively connected (i.e., routed) between any one of the
plain old telephone service connection lines 44 and/or
integrated services digital network connection lines 48
and the first plurality of the regional processors 58(1),
30 58(2), ..., 58(n). A second plurality of the regional
processors 58'(1), 58'(2), ..., 58'(m) are connected via

-9-

DL2 interface connections 62 to the group switch/time switch 42, and are connected to the switch control processor 54 via the regional processor control bus 56. Similarly, responsive to instructions issued by the switch control processor 54, data communications may be selectively connected (i.e., routed) between any one of the E1/T1 trunk connections 52 and the second plurality of the regional processors 58'(1), 58'(2), ..., 58'(m). The first plurality of the regional processors 58(1), 58(2), ..., 58(n) and the second plurality of the regional processors 58'(1), 58'(2), ..., 58'(m) are interconnected by an Ethernet link 64. Responsive to instructions issued by the switch control processor 54 and transmitted over the regional processor control bus 56, data communications may be selectively inserted into and extracted from the Ethernet link 64 by any of the first and second plurality of regional processors 58 and 58'.

Using the Ethernet link 64, a direct connection is made from the local exchange 40 to the Internet 66 (perhaps through an Internet access point edge router 68). The Ethernet link 64 is further used to make a connection between the local exchange 40 and a plurality of asymmetric data subscriber line (ADSL) connection lines 70 to users 72. A network terminal (NT) 74, providing an ADSL termination, interfaces the plurality of asymmetric data subscriber line connection lines 70 to the Ethernet link 64. The network terminal 74 also interfaces the lines 70 to the group switch/time switch 42 via one or more of the plain old telephone service connection lines 44. As the asymmetric data subscriber line connection lines 70 carry both voice and data (sometimes

-10-

simultaneously), the network terminal 74 functions to reroute the voice components of a call over the plain old telephone service connection lines 44 to the group switch/time switch 42, and reroute the data components of that call over the Ethernet link 64.

5 The first plurality of regional processors 58(1), 58(2), ..., 58(n) function to convert (e.g., format or frame) the actual user data communications between the data communications protocol required for transmission over the plain old telephone service connection lines 44 and/or integrated services digital network connection lines 48 and the data communications protocol required for transmission over the Ethernet link 64. Conversely, the second plurality of the regional processors 58'(1), 10 58'(2), ..., 58'(m) function to convert (e.g., format or frame) the actual user data communications between the data communications protocol required for transmission over the Ethernet link 64 and the data communications protocol required for transmission over E1/T1 trunk connections 52. The Ethernet link 64 functions to concentrate the packets of the data communications received from the plain old telephone service connection lines 44, integrated services digital network connection lines 48 and/or asymmetric data subscriber line connection lines 70 for switch 42 routing and transmission over the E1/T1 trunk connections 52. Similarly, the Ethernet link 64 functions to concentrate the packets of the data communications received from the E1/T1 trunk connections 52 for switch 42 routing and transmission over the plain old telephone service connection lines 44, integrated

15
20
25
30

-11-

services digital network connection lines 48 and/or asymmetric data subscriber line connection lines 70.

The local exchange 40 still further includes a modem pool 76 implemented on a digital signal processing (DSP) platform and connected via DL2 interface connections 78(1) and 78(2) to the group switch/time switch 42. In particular, the modem pool 76 may be selectively connected by the group switch/time switch 42 (at the instruction of the switch control processor 54) through DL2 interface connection 78(1) to any one of the plain old telephone service connection lines 44. The modem pool 76 processes (e.g., modulates and de-modulates) data communications being transmitted to or received from users 46 over the plain old telephone service connection lines 44. The DL2 interface connection 78(2) and the DL2 interface connections 60 further enable the modem pool 76 to be selectively connected (in response to switch control processor 54 instruction) through the group switch/time switch 42 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). This provides a route for data packet transmission between the plain old telephone service connection lines 44 and the Ethernet link 64.

Reference is now made to FIGURE 4 wherein there is shown a simplified block diagram of the regional processors 58 and 58'. A media interface line driver 80 provides the interface connections for the DL2 interface connections 60 and 62 to the group switch/time switch 42, the interface connection to the Ethernet link 64, and the interface connection to the regional processor control bus 56. A central processing unit (CPU) 82 controls the operation of the line driver 80 in effectuating data

-12-

communications between the DL2 interface connections 60 and 62 and the Ethernet link 64. The central processing unit 82 further performs the conversion (e.g., formatting or framing) among and between the various data communications protocols required for transmission over the Ethernet link 64 and the DL2 interface connections 60 and 62 (as required by the plain old telephone service connection lines 44, integrated services digital network connection lines 48 and/or the E1/T1 trunk connections 52). Instructions directing the manner of regional processor 58 or 58' operation are received from the switch control processor 54 by the central processing unit 82 over the control processor bus 56.

Reference is now made to FIGURE 5 wherein there is shown the use of the local exchange 40 including an integrated access server functionality of FIGURE 2 within the public switched telephone network and/or integrated services digital network (PSTN/ISDN) 53. Like the network 10 of FIGURE 1, the network 53 includes a plurality of local exchanges (LE's) 40 and a plurality of transit exchanges (TE's) 20. The local exchanges 40 and transit exchanges 20 are interconnected with each other by E1/T1 trunk connections 52. The E1/T1 trunk connections 52 also provide interconnections between the local exchanges 40 themselves, and between the transit exchanges 20 themselves. Each local exchange 40 is connected to a plurality of subscribers through plain old telephone service (POTS) connection lines 44, integrated services digital network (ISDN) connection lines 48, and asymmetric data subscriber line (ADSL) connection lines 70. For the subscribers comprising users 46 connected to the plain old

-13-

telephone service connection lines 44, it will of course be understood that a modem (not shown) is needed to engage in a data communication. For the subscribers comprising users 50 connected to the integrated services digital network connection lines 48, on the other hand, it will of course be understood that a network terminal (NT - not shown) is needed to engage in a data communication. Furthermore, for the subscribers comprising users 72, it will of course be understood that an ADSL modem (not shown) is needed to engage in a data and/or voice communication. The local exchanges 40 are further connected to the Internet 66 (perhaps through the Internet access point edge router 68) using the Ethernet link 64.

Reference is now made in combination to FIGURES 3 and 5 for a description of the manner of operation of the local exchange 40 including an integrated access server functionality for supporting more efficient data communications. In one mode of operation, the local exchange 40 supports efficient and direct user/subscriber data communications over a private data communications network such as the Internet 66. In another mode of operation, the local exchange 40 supports efficient and direct user/subscriber data communications over a public data communications network such as the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications). It will, of course, be understood that the local exchange 40 will simultaneously support such user/subscriber data communications over both the private and public networks in both modes of operation if necessary.

-14-

With respect to the first mode of operation relating to user/subscriber data communications over a private data communications network such as the Internet 66, take first a data communication between a user 46 connected to one of the plurality of plain old telephone service (POTS) connection lines 44 and the Internet 66. The data communication carried from the user 46 over the plain old telephone service connection line 44 comprises an analog data communication which is routed from the group switch/time switch 42 over the DL2 interface connection 78(1) to the modem pool 76 where it is de-modulated and re-output back over the DL2 interface connection 78(2). The data communication is then routed back through the group switch/time switch 42 and over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the plain old telephone service connection line 44 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 46, as well as users 50 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The

-15-

first regional processors 58 further perform a routing functionality in directing the data communications towards the proper Internet destinations.

Next, consider a data communication between a user 50 connected to one of the plurality of integrated services digital network (ISDN) 2B+D connection lines 48 and the Internet 66. The data communication carried from the user 50 over the integrated services digital network connection line 48 comprises a digital data communication, thus there is no need to rout the communication through the modem pool 76. Rather, the digital data communication is directly routed from the group switch/time switch 42 over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 50, as well as users 46 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The first regional processors 58 further

-16-

perform a routing functionality in directing the data communications towards the proper Internet destinations.

Next, consider a data communication between a user 72 connected to one of the plurality of asymmetric data subscriber line (ADSL) connection lines 70 and the Internet 66. The data communication at issue may be carried over the asymmetric data subscriber line connection line 70 along with a voice communication. The network terminal 74 separates the data components from the voice components of the combined communication. The data components are then rerouted to the Ethernet link 64 already the proper protocol (for example, transmission control protocol/Internet protocol (TCP/IP)). The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 72, as well as users 46 and 50) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The first regional processors 58 further perform a routing functionality in directing the data communications towards the proper Internet destinations.

Reverse processes occur with respect to data communications received from the Internet 66 for group switch/time switch 42 transmission to the users 46, 50 and 72. Thus, the Ethernet link 64 functions to concentrate the data communications received from the Internet 66 and the second regional processors 58'. Furthermore, the first regional processors 58 function to extract the data communications from the Ethernet link 64, and switch (e.g., frame) from the protocol required for transmission

-17-

over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the plain old telephone service connection line 44 and integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The first regional processors 58 and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper ones of the plain old telephone service connection lines 44, integrated services digital network connection lines 48, or asymmetric data subscriber line connection lines 70.

With respect to the second mode of operation relating to user/subscriber data communications over a public data communications network such as the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications), take first a data communication between a user 46 connected to one of the plurality of plain old telephone service (POTS) connection lines 44 and another network user (not shown). The data communication carried from the user 46 over the plain old telephone service connection line 44 comprises an analog data communication which is routed from the group switch/time switch 42 through the DL2 interface connection 78(1) to the modem pool 76 where it is de-modulated and re-output back to the switch over the DL2 interface connection 78(2). The data communication is then routed over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional

-18-

processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the plain old telephone service connection line 44 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the foregoing data communication with other data communications (from other users 46, as well as users 50 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the protocol of the data communication is switched (e.g., framed) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the E1/T1 trunk connection 52 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The protocol converted data communication is then output via the DL2 interface connections 62 and switch 42 for transmission over one of the E1/T1 trunk connections 52 to the other user. In this connection, the second regional processors 58' and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper one of the E1/T1 trunk connection 52 lines.

-19-

Next, consider a data communication between a user 50 connected to one of the plurality of integrated services digital network (ISDN) 2B+D connection lines 48 and another user (not shown) over the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications). The data communication carried from the user 50 over the integrated services digital network connection line 48 comprises a digital data communication, thus there is no need to rout the communication through the modem pool 76. Rather, the digital data communication is directly routed from the group switch/time switch 42 over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the foregoing data communication with other data communications (from other users 50, as well as users 46 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the

-20-

protocol of the data communication is switched (e.g.,
framed) from the protocol required for transmission over
the Ethernet link 64 (for example, transmission control
protocol/Internet protocol (TCP/IP)) to the protocol
required for transmission over the E1/T1 trunk connection
5 52 (for example, point to point protocol (PPP) or serial
line Internet protocol (SLIP)). The protocol converted
data communication is then output via the exchange system
bus DL2 interface connections 62 and switch 42 for
10 transmission over one of the E1/T1 trunk connections 52
to the other user. In this connection, the second
regional processors 58' and group switch/time switch 42
further perform a routing function in sending the data
communications extracted from the Ethernet link 64 over
15 the proper one of the E1/T1 trunk connection 52 lines.

Next, consider a data communication between a user
72 connected to one of the plurality of asymmetric data
subscriber line (ADSL) connection lines 70 and another
user (not shown) over the public switched telephone
20 network and/or integrated services digital network 53
(concurrent with conventional voice communications). The
data communication at issue may be carried over the
asymmetric data subscriber line connection line 70 along
with a voice communication. The network terminal 74
25 separates the data components from the voice components.
The data components are then rerouted to the Ethernet link
64 already the proper protocol (for example, transmission
control protocol/Internet protocol (TCP/IP)). The
Ethernet link 64 functions to concentrate the foregoing
30 data communication with other data communications (from
other users 72, as well as users 46 and 50) received from

-21-

the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the protocol of the data communication is switched (e.g., framed) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the E1/T1 trunk connection 52 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The protocol converted data communication is then output via the exchange system bus DL2 interface connections 62 and switch 42 for transmission over one of the E1/T1 trunk connections 52 to the other user. In this connection, the second regional processors 58' and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper one of the E1/T1 trunk connection 52 lines.

Reverse processes occur with respect to data communications received over the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications) for switch 42 transmission to the users 46, 50 and 72. Thus, the Ethernet link 64 functions to concentrate the data communications received from the Internet 66 and the second regional processors 58'. The second regional processors 58' function to switch (e.g., de-frame) from the protocol required for transmission over E1/T1 trunk connection 52 (for example, point to point protocol (PPP)

-22-

or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). Furthermore, the first regional processors 58 function to extract data communications from the Ethernet link 64, and switch (e.g., frame) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the plain old telephone service connection line 44 and integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The first regional processors 58 and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper ones of the plain old telephone service connection lines 44, integrated services digital network connection lines 48, or asymmetric data subscriber line connection lines 70.

The foregoing concentration of data communications functionality may be better understood by reference to FIGURE 6 wherein there is shown a schematic diagram illustrating operation of the local exchange 40 in the handling of a plurality of data communications. Responsive to the transmission of data communications, and under the control of the switch control processor 54, the data packets 36 (graphically illustrated by tick marks on the communications lines) are routed from the switch 42 to the first regional processors 58. For plain old telephone service connection line 44 data transmissions, the data communications are first routed through the modem

-23-

pool 76. The first regional processors 58 perform any necessary protocol conversions (e.g., de-framing), and then output the data packets 36 to the Ethernet link 64 where they are concentrated with other data packets 36 received from other first regional processors and/or from the network terminal 74. Again under the control of the switch control processor 54, the second regional processors 58' then extract the data packets 36 from the Ethernet link 64 and perform any necessary protocol conversions (e.g., de-framing). The switch 42 then routes the packets onto selected ones of the E1/T1 trunk connections 52. Reverse operations occur with respect to data communications received by the local exchange 40 over the E1/T1 trunk connections 52.

FIGURE 6 illustrates, similarly to FIGURE 2, that with respect to the user data communications over the subscriber lines 44 and 48 that only a small amount of the reserved connect time for each data communication is used in actually transmitting data packets 36. As discussed above, this is not necessary a significant concern in view of similar waste on the trunk side of the switch. Unlike the operation illustrated in FIGURE 2, however, the concentration functionality implemented by the local exchange 40 results in a more efficient use of the E1/T1 trunk connections 52 where fewer individual lines are reserved and less unused (i.e., dead) time 38 between packet 36 transmissions is found.

One advantage provided by the local exchange 40 illustrated in FIGURES 3 and 6 is the consolidation of control and routing provided to the switch operator with respect to both voice and data communications. Thus, the

-24-

local exchange 40 provides all the functionality needed to serve user data traffic needs. The need for a separate Internet service provider, for example, is obviated. Another advantage provided by the local exchange 40 is robustness of operation resulting from the redundancy of using plural first and second regional processors 58 and 58' within the access server portion. The preferred architecture for this redundancy is the "one plus" concept where a spare first and second regional processor 58 and 58' are available in the event of a processor break-down. Another advantage provided by the local exchange 40 is its ability to concentrate the data traffic, and therefore to not overly bind (i.e., reserve) transport resources in the public switched telephone network and/or integrated services digital network 53 to the data traffic level. Thus, there need not necessarily be maintained a one-to-one mapping of connections between user communications lines 44 or 48 and the E1/T1 trunk connection 52 lines through the switch 42. Another benefit to the operator provided by the local exchange 40 is that the existing charging and billing system in place for handling conventional voice and data calls using reserved circuit connections can also be used to charge (in an integrated bill) for the concentrated data services provided in communicating over the E1/T1 trunk connection 52 lines and for providing users with Internet 66 access via the Ethernet link 64. Thus, users need not necessarily contract with a separate Internet service provider, or have to process a separate Internet service bill, as Internet access is provided directly through the local exchange 40. Alternatively, the operator utilizes the

-25-

local exchange 40 to concentrate user data traffic for transmission over the E1/T1 trunk connection 52 lines to an Internet service provider who pays the operator for the data concentration services provided by the exchange. Yet
5 another benefit of the incorporation of the access server functionality within the local exchange 40 is the availability of the telecommunications network operation and maintenance system (network) for use in maintaining the functionality of the access server. A further benefit
10 provided by the local exchange 40 is the supporting of both permanent and dial-up (i.e., non-permanent) data communications connections over the E1/T1 trunk connection 52 lines.

Although preferred embodiments of the method and
15 apparatus of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications
20 and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-26-

WHAT IS CLAIMED IS:

1. A packet data concentrating telecommunications switch, comprising:

5 a group switch/time switch for selectively interconnecting among and between a plurality of subscriber connection lines, a plurality of trunk connection lines and a plurality of regional processor interface lines;

10 a plurality of regional processors connected to the group switch/time switch over the corresponding plurality of regional processor interface lines; and

a local area network link connected to both the first and second plurality of regional processors;

15 wherein the plurality of regional processors function to convert packet data communications between a first format used for transmission over the subscriber connection lines and trunk connection lines and a second format used for transmission over the local area network link; and

20 wherein the local area network link functions to concentrate packet data communications received from certain ones of the plurality of regional processors via the group switch/time switch for concentrated output to certain other one or ones of the plurality of regional processors and back through the group switch/time switch.

25 2. The switch as in claim 1 wherein the plurality of subscriber connection lines comprise plain old telephone service (POTS) lines and integrated service digital network (ISDN) lines.

-27-

3. The switch as in claim 1 wherein the plurality of trunk connection lines comprise E1/T1 trunk lines.

4. The switch as in claim 1 wherein the plurality of regional processor interface lines implement a DL2 interface connection.

5. The switch as in claim 1 wherein the local area network link comprises an ethernet link.

10

6. The switch as in claim 1 wherein the local area network link is connected to an Internet access point to allow concentrated data packet communication between the Internet and the switch to and from the plurality of regional processors.

15

7. The switch as in claim 1 further comprising:
a modem pool to modulate and demodulate packet data communications received from or sent to the plurality of subscriber connection lines; and

20

modem connection lines connecting the modem pool to the group switch/time switch wherein the group switch functions to interconnect among and between the modem connection lines, the plurality of subscriber connection lines, the plurality of trunk connection lines and the plurality of regional processor interface lines.

25

8. The switch as in claim 1 further comprising a network terminal providing asymmetric data subscriber line termination and an interface with the local area network

30

-28-

link and at least one of the plurality of subscriber connection lines.

5 9. A method for telecommunications switch operation to concentrate packet data communications, comprising the steps of:

receiving packet communications from a plurality of sources;

10 switching the received packet data communications from the plurality of sources to a first interface; and

concentrating the received and switched packet communications from the first interface onto a local area network link.

15 10. The method as in claim 9 further including the step of converting by the first interface between a first format of the received packet communications and a second format suitable for the local area network link.

20 11. The method as in claim 9 further including the steps of:

extracting the concentrated packet data communications from the local area network link to a second interface; and

25 switching the concentrated packet data communications extracted through the second interface to a destination.

30 12. The method as in claim 11 further including the step of converting by the second interface between a first format of the packet data communications and a second format suitable for the local area network link.

-29-

13. The method as in claim 9 further including the step of transmitting the concentrated packet data communications from the local area network link to an Internet access point to allow concentrated data packet communication between the plurality of sources and the Internet.

14. The method as in claim 9 further including the step of modulating/demodulating the packet communications from the plurality of sources.

15. In a telecommunications switch, comprising:
a group switch/time switch for selectively interconnecting among and between a plurality of subscriber connection lines, a plurality of trunk connection lines and a plurality of regional processor interface lines;

a plurality of regional processors connected to the group switch/time switch over the corresponding plurality of regional processor interface lines; and

a local area network link connected to both the first and second plurality of regional processors;

a method for operating the telecommunications switch to concentrate packet data communications, comprising the steps of:

receiving packet data communications from a plurality of sources over the subscriber connection lines;

switching the received packet data communications through the group switch/time switch to first ones of the plurality of regional processors; and

-30-

inserting for concentration by the first ones of the plurality of regional processors of the received and switched packet data communications onto the local area network link.

5

16. The method as in claim 15 further including the step of converting by the first ones of the plurality of regional processors of the packet data communications between a first format used for transmission over the subscriber connection lines and a second format used for transmission over the local area network link.

10

17. The method as in claim 15 further including the step of transmitting the concentrated packet data communications from the local area network link to an Internet access point to allow concentrated data packet communication transmission from the plurality of sources to the Internet.

15

18. The method as in claim 17 further including the step of performing reverses of the steps of claims 15 and 17 to allow concentrated data packet communication transmission from the Internet to the plurality of sources.

20

25

19. The method as in claim 15 further including the steps of:

extracting the concentrated packet data communications from the local area network link to at least one of second ones of the plurality of regional processors; and

30

-31-

switching the extracted concentrated packet data communications through the group switch/time switch onto one of the plurality of trunk connection lines to allow concentrated data packet communication transmission from the plurality of sources to the trunk connection lines.

20. The method as in claim 19 further including the step of converting by the second one of the plurality of regional processors of the packet data communications between a first format used for transmission over the trunk connection lines and a second format used for transmission over the local area network link.

21. The method as in claim 19 further including the step of performing reverses of the steps of claims 19 and 15 to allow concentrated data packet communication transmission from the trunk connection lines to the plurality of sources.

22. The method as in claim 15 wherein the telecommunications switch further comprises a modem pool, and the method further comprises the step of modulating/demodulating packet data communications received from or sent to the plurality of subscriber connection lines.

2/3




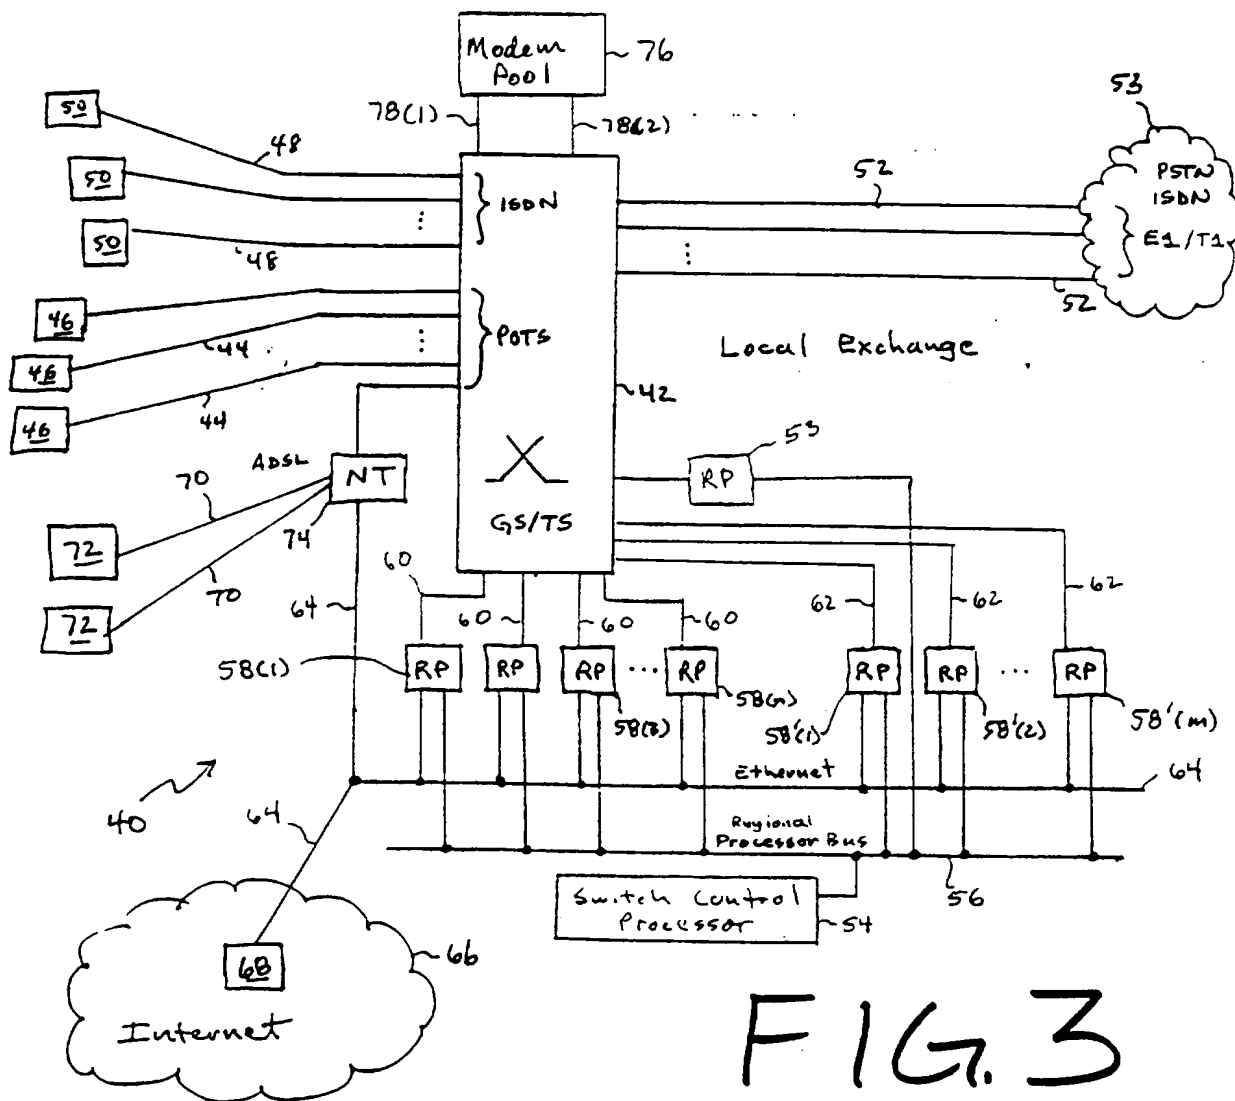


FIG. 3

FIG. 4

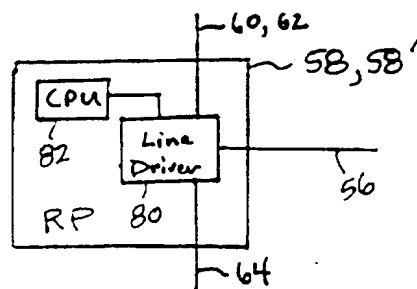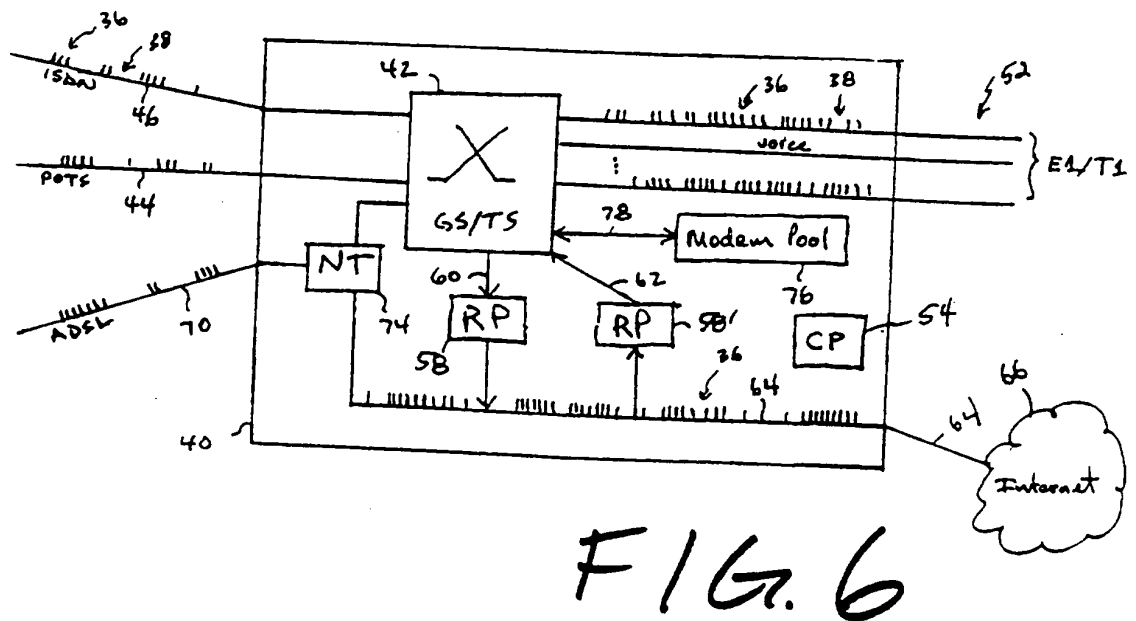

3/3

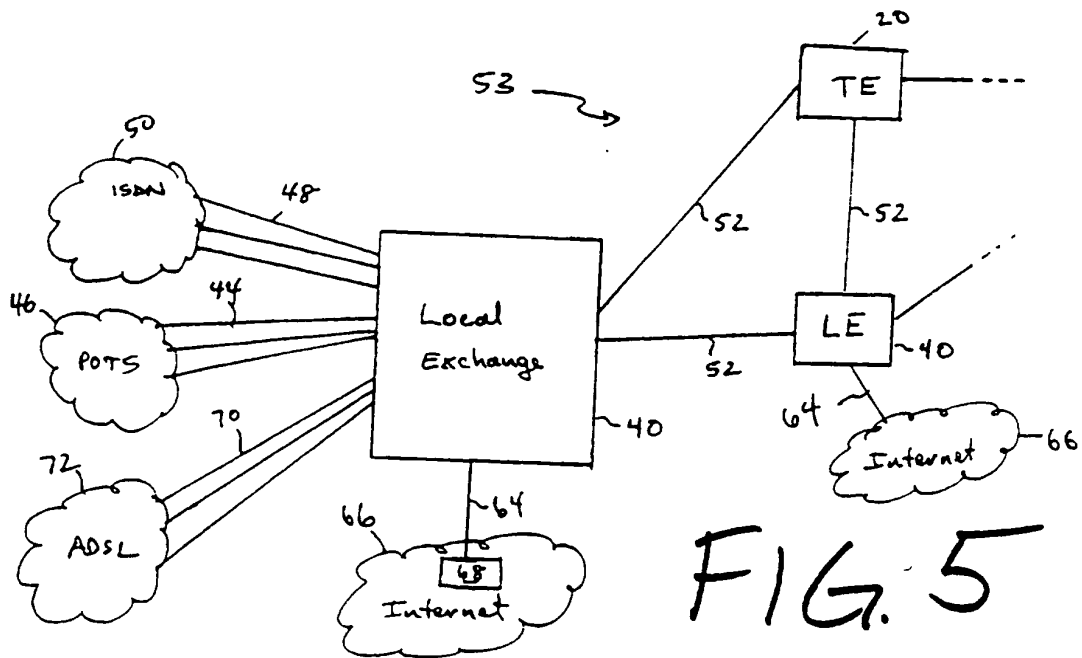




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M 3/00, H04Q 11/04, H04L 12/64		A3	(11) International Publication Number: WO 97/50230
			(43) International Publication Date: 31 December 1997 (31.12.97)
(21) International Application Number: PCT/US97/10987		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 June 1997 (24.06.97)		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(30) Priority Data: 60/020,059 24 June 1996 (24.06.96) US Not furnished 20 June 1997 (20.06.97) US		(88) Date of publication of the international search report: 5 February 1998 (05.02.98)	
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: BJORKMAN, Jan; S-Stockholm (SE). NYMAN, Anders; S-Stockholm (SE). BERGSTROM, Ingvar; S-Stockholm (SE). DINHA, Francis; S-Stockholm (SE). MELEN, Bjorn; FIN-Helsinki (FI).			
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).			

(54) Title: TELECOMMUNICATIONS SWITCH INCLUDING AN INTEGRATED INTERNET ACCESS SERVER

(57) Abstract

A telecommunications switch is provided with an internal ethernet link which is connected to a group switch/time switch portion of the switch through a number of interface processors. The group switch/time switch portion functions to switch data communications among and between the subscriber lines, trunk lines and the interface processors. The ethernet link serves as a concentrator for packet data communications carried over the subscriber/trunk lines and handled by switch. The interface processors operate to selectively insert and extract packet data communications to and from the ethernet link. A connection is made via the ethernet link to an Internet access point to allow concentrated data packet communication with the Internet.

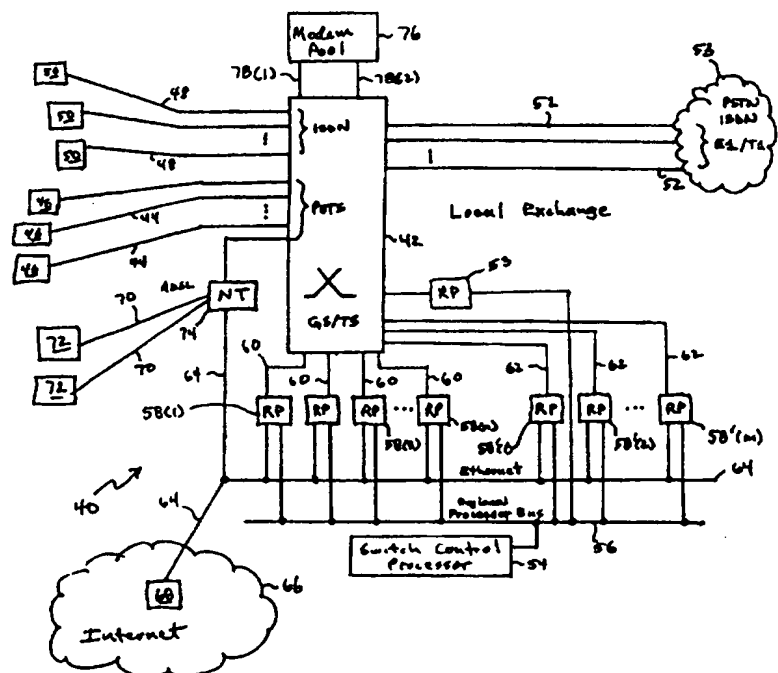

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TC	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Kazakhstan	PT	Portugal		
CU	Cuba	KZ	Saint Lucia	RO	Romania		
CZ	Czech Republic	LC	Liechtenstein	RU	Russian Federation		
DE	Germany	LI	Sri Lanka	SD	Sudan		
DK	Denmark	LK	Liberia	SE	Sweden		
EE	Estonia	LR		SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/10987

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04M3/00 H04Q11/04 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 312 628 A (IBM) 26 April 1989 see abstract see column 4, line 51 - column 5, line 47 see figures 1,5,6 ---	1,2, 9-12,15, 16,19-21
X	EP 0 664 658 A (AT & T CORP) 26 July 1995 see column 4, line 25 - line 57 see column 7, line 21 - column 9, line 28 see figure 2 ---	1,9,15
Y	PATENT ABSTRACTS OF JAPAN vol. 010, no. 184 (E-415), 27 June 1986 & JP 61 030148 A (NEC CORP), 12 February 1986, see abstract ---	1-3,9, 14,15
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 December 1997

Date of mailing of the international search report

18/12/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Megalou, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/10987

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 018, no. 635 (E-1638), 5 December 1994 & JP 06 245243 A (HITACHI TELECOM TECHNOL LTD), 2 September 1994, see abstract	1-3, 9, 14, 15
P, X	----- PATENT ABSTRACTS OF JAPAN vol. 097, no. 002, 28 February 1997 & JP 08 265884 A (OKI ELECTRIC IND CO LTD), 11 October 1996, see abstract	1, 9, 10, 15, 16
E	----- US 5 668 857 A (MCHALE JOHN F) 16 September 1997 see the whole document	1-22
A	----- EP 0 194 491 A (INT STANDARD ELECTRIC CORP) 17 September 1986 see abstract; figure 1 -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/10987

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0312628 A	26-04-89	DE 3788649 D	10-02-94
		DE 3788649 T	23-06-94
		JP 1123548 A	16-05-89
		SG 173494 A	28-04-95
		US 5008878 A	16-04-91
EP 0664658 A	26-07-95	US 5434854 A	18-07-95
		CA 2118440 A	28-06-95
		CN 1126928 A	17-07-96
		JP 7212401 A	11-08-95
US 5668857 A	16-09-97	WO 9737458 A	09-10-97
EP 0194491 A	17-09-86	AU 579224 B	17-11-88
		AU 5344586 A	28-08-86
		CN 1003154 B	25-01-89
		JP 2101550 C	22-10-96
		JP 7108004 B	15-11-95
		JP 61196653 A	30-08-86
		US 4789981 A	06-12-88

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04M 3/00, H04Q 11/04, H04L 12/64		A3	(11) International Publication Number: WO 97/50230
			(43) International Publication Date: 31 December 1997 (31.12.97)
(21) International Application Number: PCT/US97/10987		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 June 1997 (24.06.97)			
(30) Priority Data: 60/020,059 24 June 1996 (24.06.96) US 08/879,947 20 June 1997 (20.06.97) US			
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: BJORKMAN, Jan; Pettersbergsvagen 67, S-129 40 Hogersten (SE). NYMAN, Anders; Lugtorpsvagen 28, S-129 44 Hogersten (SE). BERGSTROM, Ingvar; Tornuggelevagen 8, S-147 34 Tumba (SE). DINHA, Francis; Apartment 1311, 7200 Preston Road, Plano, TX 75024 (US). MELEN, Bjorn, G.; Savitiilentie 12, FIN-02320 Espoo (FI).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		(88) Date of publication of the international search report: 5 February 1998 (05.02.98)	

(54) Title: TELECOMMUNICATIONS SWITCH INCLUDING AN INTEGRATED INTERNET ACCESS SERVER

(57) Abstract

A telecommunications switch is provided with an internal ethernet link which is connected to a group switch/time switch portion of the switch through a number of interface processors. The group switch/time switch portion functions to switch data communications among and between the subscriber lines, trunk lines and the interface processors. The ethernet link serves as a concentrator for packet data communications carried over the subscriber/trunk lines and handled by switch. The interface processors operate to selectively insert and extract packet data communications to and from the ethernet link. A connection is made via the ethernet link to an Internet access point to allow concentrated data packet communication with the Internet.

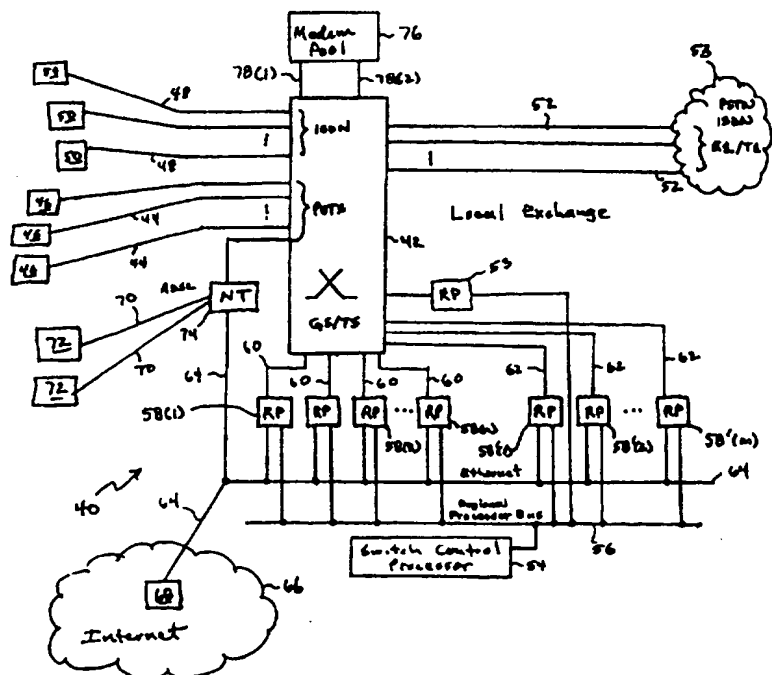

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M 3/00, H04Q 11/04, H04L 12/64		A3	(11) International Publication Number: WO 97/50230
			(43) International Publication Date: 31 December 1997 (31.12.97)
(21) International Application Number: PCT/US97/10987		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 June 1997 (24.06.97)			
(30) Priority Data: 60/020,059 24 June 1996 (24.06.96) US 08/879,947 20 June 1997 (20.06.97) US			
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: BJORKMAN, Jan; Pettersbergsvagen 67, S-129 40 Hogersten (SE). NYMAN, Anders; Lugntorpsvagen 28, S-129 44 Hogersten (SE). BERGSTROM, Ingvar; Tornugglevagen 8, S-147 34 Tumba (SE). DINHA, Francis; Apartment 1311, 7200 Preston Road, Plano, TX 75024 (US). MELEN, Bjorn, G.; Savitiilentie 12, FIN-02320 Espoo (FI).			
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).			
		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
		(88) Date of publication of the international search report: 5 February 1998 (05.02.98)	

(54) Title: TELECOMMUNICATIONS SWITCH INCLUDING AN INTEGRATED INTERNET ACCESS SERVER

(57) Abstract

A telecommunications switch is provided with an internal ethernet link which is connected to a group switch/time switch portion of the switch through a number of interface processors. The group switch/time switch portion functions to switch data communications among and between the subscriber lines, trunk lines and the interface processors. The ethernet link serves as a concentrator for packet data communications carried over the subscriber/trunk lines and handled by switch. The interface processors operate to selectively insert and extract packet data communications to and from the ethernet link. A connection is made via the ethernet link to an Internet access point to allow concentrated data packet communication with the Internet.

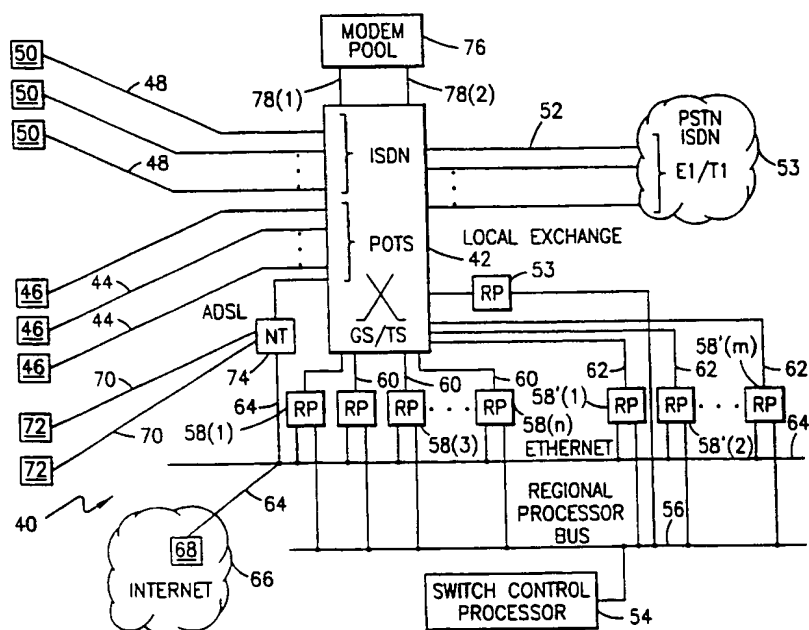

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**TELECOMMUNICATIONS SWITCH INCLUDING
AN INTEGRATED INTERNET ACCESS SERVER**

CROSS-REFERENCE TO RELATED APPLICATION

5 This Application for Patent claims priority from, and incorporates by reference the disclosure of, co-pending U.S. Provisional Application for Patent Serial No. 60/020,059, filed June 24, 1996.

10 BACKGROUND OF THE INVENTION

Technical Field of the Invention

This disclosure relates to telecommunications switches and, in particular, to the use of a telecommunications switch to provide Internet communications access and services.

Description of Related Art

There is a tremendous amount of interest these days in acquiring access to both the Internet and Internet related services. The most common mechanism used by persons to access the Internet is to contract with an Internet service provider through whom a communications connection to the Internet is obtained. Typically this connection is accomplished through the use of the existing public switched telephone network (PSTN). The person desiring Internet access, and who also subscribes to an Internet service provider, simply uses his or her computer (with a modem, if necessary) to call the Internet service provider, with that call then being routed through the public switched telephone network and the communications functionality of the service provider to an Internet access point (edge router).

-2-

It is well known, however, that data communications in general, and Internet type communications in particular, are wasteful of the limited communications resources of the telecommunications network. This is because the public switched telephone network comprises a circuit switched network, and thus each telecommunications connection between a person and their Internet service provider requires a separate physical communications link. Furthermore, this reserved connection must be maintained throughout the length of the call even though the data comprising the carried communication passes over the link on an infrequent basis. In fact, tens of seconds, if not minutes, may pass between subsequent data communications over the reserved circuit switched connection. This is because minor amounts of time are needed to convey the data, while relatively substantial amounts of time are expended in on-line human review of the conveyed information. It would be preferred if the telecommunications connections over the public switched telephone network carrying data communications could be more efficiently utilized. Such improved efficiency has application not only in providing users with telecommunications connections to their respective Internet service providers, but also in facilitating data communications between persons over the public switched telephone network itself.

SUMMARY OF THE INVENTION

Concentration of packet data communications handled by a telecommunications switch is effectuated by routing the packet data communications received from multiple

-3-

sources (such as subscriber lines or trunk connections) onto a switch supported ethernet link. From the ethernet link, a direct connection may be made to an Internet access point edge router to support Internet access. Alternatively, the ethernet link concentrated data communications may be extracted back through the switch for communication over any number of different links (such as subscriber lines or trunk connections) to support inter-subscriber data communications.

10 In particular, data communications are routed through a group switch/time switch portion of the telecommunications switch between subscriber lines (such as plain old telephone service (POTS) lines, or integrated services digital network (ISDN) lines) and a first plurality of regional processors. These first regional processors function to insert and extract subscriber data communications to and from the ethernet link. Similarly, data communications are routed through the group switch/time switch portion between trunk connections and a second plurality of regional processors. These second regional processors also function to insert and extract subscriber data communications to and from the ethernet link. The first and second regional processors perform any protocol conversions necessary for the data communications to be concentrated onto and carried by the ethernet link.

30 A direct connection for the data communications is provided via the ethernet link to the Internet through an Internet access point edge router. This allows data communications to be efficiently routed to the Internet with minimal wasting of valuable communications resources

- 4 -

(such as trunk connections). The routing of subscriber data communications through the ethernet link further supports concentrated data communication over the trunk connections also with minimal wasting of valuable communications resources (such as individual subscriber circuit connections).

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram of a public switched telephone network;

FIGURE 2 is a schematic diagram illustrating conventional operation of a local exchange in the handling of a plurality of data communications;

FIGURE 3 is a block diagram of a local exchange including an integrated access server functionality of the present invention;

FIGURE 4 is a simplified block diagram of the regional processors;

FIGURE 5 illustrates the use of the local exchange including an integrated access server functionality; and

FIGURE 6 is a schematic diagram illustrating operation of the local exchange in the handling of a plurality of data communications.

DETAILED DESCRIPTION OF THE DRAWINGS

Reference is now made to FIGURE 1 wherein there is shown a block diagram of a public switched telephone

-5-

network (PSTN) 10 providing a data communications connection between a first user 12 and their Internet service provider 14, and between the first user and a second user 16. The public switched telephone network comprises a plurality of local exchanges (LE's) 18 and a plurality of transit exchanges (TE's) 20. The local exchanges 18 and transit exchanges 20 are interconnected with each other by trunk lines 22. The trunk lines 22 also provide interconnections between the local exchanges 18 themselves, and between the transit exchanges 20 themselves. Each local exchange 18 is also connected to a plurality of subscribers via subscriber lines 24. Although only three subscribers comprising the users 12 and 16 and the Internet service provider (ISP) 14 are shown, it will be understood that many more subscriber connections are supported at each local exchange 18.

Suppose the first user (U1) 12 desires to access the Internet 26. A call is placed by the first user 12 to the telephone number of the Internet service provider 14. The call connection 28 (illustrated in bold) established by the public switched telephone network 10 passes through at least the local exchanges 18(1) and 18(2) and perhaps one or more of the other local exchanges 18 as well as perhaps one or more of the transit exchanges 20 (like exchange 20(1)). Once established, the Internet service provider 14 through connects the call to an access point (comprising an edge router) 30 of the Internet 26.

A similar connection 32 (also illustrated in bold) for data communication is established when the first user 12 and second user (U2) 16 desire to engage in a data communications over the public switched telephone network

-6-

10. A call is placed from one of the users to the other. The established connection 32 passes through at least the local exchanges 18(1) and 18(3) and perhaps one or more of the other local exchanges 18 as well as perhaps one or more of the transit exchanges 20 (like exchange 20(2)).

Because the public switched telephone network 10 comprises a circuit switched (as opposed to a packet switched) network, the connection 28 is reserved solely to handle the call between the first user 12 and the Internet service provider 14, and the connection 32 is reserved solely to handle the call between the first user 12 and the second user 16. This constitutes a waste of the available communications resources provided by the connections 28 and 32 because those connections must be constantly maintained throughout the respective calls even though the data communications carried thereby occur on only a relatively infrequent basis.

The foregoing may be better understood by reference to FIGURE 2 wherein there is shown a schematic diagram illustrating conventional operation of the local exchange 18 in the handling of a plurality of data communications. The local exchange 18 includes a group switch/time switch (GS/TS) 34 which functions to connect any one of the subscriber lines 24 to any one of the trunk lines 22. Thus, if n users connected to the subscriber lines 24 desire to engage in data communications, the switch 34 reserves and makes n corresponding connections to n trunk lines 22. Each user data communication comprises a plurality of data packets 36 (graphically illustrated by tick marks on the communications lines). FIGURE 2 illustrates with respect to the user data communications

-7-

over the subscriber lines 24 and trunk lines 22 that only a small amount of the reserved connect time for each data communication is used in actually transmitting data packets 36. A significant amount of unused (i.e., dead) time 38 between packet 36 transmissions wastefully occurs with respect to each data communication. This resource waste is not so much of a significant problem with respect to use of the subscriber lines 24. It is, however, a significant concern with respect to use of the trunk lines 22 which could instead be used for carrying user voice communications (and perhaps other data communications). There is a need then for concentrating the data communications carried by the trunk lines 22. Such a concentration of the packets 36 would result in a utilization of fewer trunk lines 22 to carry the same amount of user data communications, and would also result in the transmission of those communications with reduced instances of unused time 38.

Reference is now made to FIGURE 3 wherein there is shown a block diagram of a local exchange 40 including an integrated access server functionality. The local exchange comprises a standard Ericsson AXE-type switch including a group switch/time switch (GS/TS) 42 which is connected to users 46 via a plurality of plain old telephone service (POTS) connection lines 44, as well as connected to users 50 via a plurality of integrated services digital network (ISDN) 2B+D connection lines 48. The group switch/time switch 42 is further connected to a plurality of E1/T1 trunk connections 52 through which a communications interconnection is made to other local exchanges as well as to transit exchanges over the public

switched telephone network and/or integrated services
digital network (PSTN/ISDN) 53. The group switch/time
switch 42 of the local exchange 40 has a configuration and
operation well known in the art for selectively
5 interconnecting certain selected ones of the plain old
telephone service connection lines 44 and/or integrated
services digital network connection lines 48 to certain
selected ones of the E1/T1 trunk connections 52. Control
over the operation of the group switch/time switch 42 in
10 making the foregoing selected interconnections is
effectuated by a regional processor (RP) 53 under the
command of a central switch control processor 54. A
regional processor control bus 56 carries the signaling
between the switch control processor 54 and regional
15 processor 53 necessary to control group switch/time switch
42 operation.

The local exchange 40 further includes a plurality
of additional regional processors used in providing the
integrated access server functionality. A first plurality
20 of the regional processors 58(1), 58(2), ..., 58(n) are
connected via DL2 interface connections 60 to the group
switch/time switch 42, and are connected to the switch
control processor 54 via the regional processor control
bus 56. Responsive to instructions issued by the switch
25 control processor 54, data communications may be
selectively connected (i.e., routed) between any one of the
plain old telephone service connection lines 44 and/or
integrated services digital network connection lines 48
and the first plurality of the regional processors 58(1),
30 58(2), ..., 58(n). A second plurality of the regional
processors 58'(1), 58'(2), ..., 58'(m) are connected via

-9-

DL2 interface connections 62 to the group switch/time switch 42, and are connected to the switch control processor 54 via the regional processor control bus 56. Similarly, responsive to instructions issued by the switch control processor 54, data communications may be selectively connected (i.e., routed) between any one of the E1/T1 trunk connections 52 and the second plurality of the regional processors 58'(1), 58'(2), ..., 58'(m). The first plurality of the regional processors 58(1), 58(2), ..., 58(n) and the second plurality of the regional processors 58'(1), 58'(2), ..., 58'(m) are interconnected by an Ethernet link 64. Responsive to instructions issued by the switch control processor 54 and transmitted over the regional processor control bus 56, data communications may be selectively inserted into and extracted from the Ethernet link 64 by any of the first and second plurality of regional processors 58 and 58'.

Using the Ethernet link 64, a direct connection is made from the local exchange 40 to the Internet 66 (perhaps through an Internet access point edge router 68). The Ethernet link 64 is further used to make a connection between the local exchange 40 and a plurality of asymmetric data subscriber line (ADSL) connection lines 70 to users 72. A network terminal (NT) 74, providing an ADSL termination, interfaces the plurality of asymmetric data subscriber line connection lines 70 to the Ethernet link 64. The network terminal 74 also interfaces the lines 70 to the group switch/time switch 42 via one or more of the plain old telephone service connection lines 44. As the asymmetric data subscriber line connection lines 70 carry both voice and data (sometimes

-10-

simultaneously), the network terminal 74 functions to reroute the voice components of a call over the plain old telephone service connection lines 44 to the group switch/time switch 42, and reroute the data components of that call over the Ethernet link 64.

5 The first plurality of regional processors 58(1), 58(2), ..., 58(n) function to convert (e.g., format or frame) the actual user data communications between the data communications protocol required for transmission over the plain old telephone service connection lines 44 and/or integrated services digital network connection lines 48 and the data communications protocol required for transmission over the Ethernet link 64. Conversely, the second plurality of the regional processors 58'(1), 10 58'(2), ..., 58'(m) function to convert (e.g., format or frame) the actual user data communications between the data communications protocol required for transmission over the Ethernet link 64 and the data communications protocol required for transmission over E1/T1 trunk connections 52. The Ethernet link 64 functions to concentrate the packets of the data communications received from the plain old telephone service connection lines 44, integrated services digital network connection lines 48 and/or asymmetric data subscriber line connection lines 70 for switch 42 routing and transmission over the E1/T1 trunk connections 52. Similarly, the Ethernet link 64 functions to concentrate the packets of the data communications received from the E1/T1 trunk connections 52 for switch 42 routing and transmission over the plain old telephone service connection lines 44, integrated

-11-

services digital network connection lines 48 and/or asymmetric data subscriber line connection lines 70.

The local exchange 40 still further includes a modem pool 76 implemented on a digital signal processing (DSP) platform and connected via DL2 interface connections 78(1) and 78(2) to the group switch/time switch 42. In particular, the modem pool 76 may be selectively connected by the group switch/time switch 42 (at the instruction of the switch control processor 54) through DL2 interface connection 78(1) to any one of the plain old telephone service connection lines 44. The modem pool 76 processes (e.g., modulates and de-modulates) data communications being transmitted to or received from users 46 over the plain old telephone service connection lines 44. The DL2 interface connection 78(2) and the DL2 interface connections 60 further enable the modem pool 76 to be selectively connected (in response to switch control processor 54 instruction) through the group switch/time switch 42 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). This provides a route for data packet transmission between the plain old telephone service connection lines 44 and the Ethernet link 64.

Reference is now made to FIGURE 4 wherein there is shown a simplified block diagram of the regional processors 58 and 58'. A media interface line driver 80 provides the interface connections for the DL2 interface connections 60 and 62 to the group switch/time switch 42, the interface connection to the Ethernet link 64, and the interface connection to the regional processor control bus 56. A central processing unit (CPU) 82 controls the operation of the line driver 80 in effectuating data

-12-

communications between the DL2 interface connections 60 and 62 and the Ethernet link 64. The central processing unit 82 further performs the conversion (e.g., formatting or framing) among and between the various data communications protocols required for transmission over the Ethernet link 64 and the DL2 interface connections 60 and 62 (as required by the plain old telephone service connection lines 44, integrated services digital network connection lines 48 and/or the E1/T1 trunk connections 52). Instructions directing the manner of regional processor 58 or 58' operation are received from the switch control processor 54 by the central processing unit 82 over the control processor bus 56.

Reference is now made to FIGURE 5 wherein there is shown the use of the local exchange 40 including an integrated access server functionality of FIGURE 2 within the public switched telephone network and/or integrated services digital network (PSTN/ISDN) 53. Like the network 10 of FIGURE 1, the network 53 includes a plurality of local exchanges (LE's) 40 and a plurality of transit exchanges (TE's) 20. The local exchanges 40 and transit exchanges 20 are interconnected with each other by E1/T1 trunk connections 52. The E1/T1 trunk connections 52 also provide interconnections between the local exchanges 40 themselves, and between the transit exchanges 20 themselves. Each local exchange 40 is connected to a plurality of subscribers through plain old telephone service (POTS) connection lines 44, integrated services digital network (ISDN) connection lines 48, and asymmetric data subscriber line (ADSL) connection lines 70. For the subscribers comprising users 46 connected to the plain old

-13-

telephone service connection lines 44, it will of course be understood that a modem (not shown) is needed to engage in a data communication. For the subscribers comprising users 50 connected to the integrated services digital network connection lines 48, on the other hand, it will of course be understood that a network terminal (NT - not shown) is needed to engage in a data communication. Furthermore, for the subscribers comprising users 72, it will of course be understood that an ADSL modem (not shown) is needed to engage in a data and/or voice communication. The local exchanges 40 are further connected to the Internet 66 (perhaps through the Internet access point edge router 68) using the Ethernet link 64.

Reference is now made in combination to FIGURES 3 and 5 for a description of the manner of operation of the local exchange 40 including an integrated access server functionality for supporting more efficient data communications. In one mode of operation, the local exchange 40 supports efficient and direct user/subscriber data communications over a private data communications network such as the Internet 66. In another mode of operation, the local exchange 40 supports efficient and direct user/subscriber data communications over a public data communications network such as the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications). It will, of course, be understood that the local exchange 40 will simultaneously support such user/subscriber data communications over both the private and public networks in both modes of operation if necessary.

-14-

With respect to the first mode of operation relating to user/subscriber data communications over a private data communications network such as the Internet 66, take first a data communication between a user 46 connected to one of the plurality of plain old telephone service (POTS) connection lines 44 and the Internet 66. The data communication carried from the user 46 over the plain old telephone service connection line 44 comprises an analog data communication which is routed from the group switch/time switch 42 over the DL2 interface connection 78(1) to the modem pool 76 where it is de-modulated and re-output back over the DL2 interface connection 78(2). The data communication is then routed back through the group switch/time switch 42 and over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the plain old telephone service connection line 44 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 46, as well as users 50 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The

-15-

first regional processors 58 further perform a routing functionality in directing the data communications towards the proper Internet destinations.

Next, consider a data communication between a user 50 connected to one of the plurality of integrated services digital network (ISDN) 2B+D connection lines 48 and the Internet 66. The data communication carried from the user 50 over the integrated services digital network connection line 48 comprises a digital data communication, thus there is no need to route the communication through the modem pool 76. Rather, the digital data communication is directly routed from the group switch/time switch 42 over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 50, as well as users 46 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The first regional processors 58 further

-16-

perform a routing functionality in directing the data communications towards the proper Internet destinations.

Next, consider a data communication between a user 72 connected to one of the plurality of asymmetric data subscriber line (ADSL) connection lines 70 and the Internet 66. The data communication at issue may be carried over the asymmetric data subscriber line connection line 70 along with a voice communication. The network terminal 74 separates the data components from the voice components of the combined communication. The data components are then rerouted to the Ethernet link 64 already the proper protocol (for example, transmission control protocol/Internet protocol (TCP/IP)). The Ethernet link 64 functions to concentrate the data communication with other data communications (from other users 72, as well as users 46 and 50) received from the first regional processors 58 and network terminal 74. The data communication is then sent over the Internet 66 through the Internet access point edge router 68. The first regional processors 58 further perform a routing functionality in directing the data communications towards the proper Internet destinations.

Reverse processes occur with respect to data communications received from the Internet 66 for group switch/time switch 42 transmission to the users 46, 50 and 72. Thus, the Ethernet link 64 functions to concentrate the data communications received from the Internet 66 and the second regional processors 58'. Furthermore, the first regional processors 58 function to extract the data communications from the Ethernet link 64, and switch (e.g., frame) from the protocol required for transmission

-17-

over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the plain old telephone service connection line 44 and integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The first regional processors 58 and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper ones of the plain old telephone service connection lines 44, integrated services digital network connection lines 48, or asymmetric data subscriber line connection lines 70.

With respect to the second mode of operation relating to user/subscriber data communications over a public data communications network such as the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications), take first a data communication between a user 46 connected to one of the plurality of plain old telephone service (POTS) connection lines 44 and another network user (not shown). The data communication carried from the user 46 over the plain old telephone service connection line 44 comprises an analog data communication which is routed from the group switch/time switch 42 through the DL2 interface connection 78(1) to the modem pool 76 where it is de-modulated and re-output back to the switch over the DL2 interface connection 78(2). The data communication is then routed over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional

-18-

processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the plain old telephone service connection line 44 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the foregoing data communication with other data communications (from other users 46, as well as users 50 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the protocol of the data communication is switched (e.g., framed) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the E1/T1 trunk connection 52 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The protocol converted data communication is then output via the DL2 interface connections 62 and switch 42 for transmission over one of the E1/T1 trunk connections 52 to the other user. In this connection, the second regional processors 58' and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper one of the E1/T1 trunk connection 52 lines.

-19-

Next, consider a data communication between a user 50 connected to one of the plurality of integrated services digital network (ISDN) 2B+D connection lines 48 and another user (not shown) over the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications). The data communication carried from the user 50 over the integrated services digital network connection line 48 comprises a digital data communication, thus there is no need to rout the communication through the modem pool 76. Rather, the digital data communication is directly routed from the group switch/time switch 42 over the DL2 interface connections 60 to the first plurality of regional processors 58(1), 58(2), ..., 58(n). In the first regional processor 58, the protocol of the data communication is switched (e.g., de-framed) from the protocol required for transmission over the integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). The protocol converted data communication is then output to the Ethernet link 64. The Ethernet link 64 functions to concentrate the foregoing data communication with other data communications (from other users 50, as well as users 46 and 72) received from the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the

-20-

protocol of the data communication is switched (e.g.,
framed) from the protocol required for transmission over
the Ethernet link 64 (for example, transmission control
protocol/Internet protocol (TCP/IP)) to the protocol
5 required for transmission over the E1/T1 trunk connection
52 (for example, point to point protocol (PPP) or serial
line Internet protocol (SLIP)). The protocol converted
data communication is then output via the exchange system
bus DL2 interface connections 62 and switch 42 for
10 transmission over one of the E1/T1 trunk connections 52
to the other user. In this connection, the second
regional processors 58' and group switch/time switch 42
further perform a routing function in sending the data
communications extracted from the Ethernet link 64 over
15 the proper one of the E1/T1 trunk connection 52 lines.

Next, consider a data communication between a user
72 connected to one of the plurality of asymmetric data
subscriber line (ADSL) connection lines 70 and another
user (not shown) over the public switched telephone
20 network and/or integrated services digital network 53
(concurrent with conventional voice communications). The
data communication at issue may be carried over the
asymmetric data subscriber line connection line 70 along
with a voice communication. The network terminal 74
25 separates the data components from the voice components.
The data components are then rerouted to the Ethernet link
64 already the proper protocol (for example, transmission
control protocol/Internet protocol (TCP/IP)). The
Ethernet link 64 functions to concentrate the foregoing
30 data communication with other data communications (from
other users 72, as well as users 46 and 50) received from

-21-

the first regional processors 58 and network terminal 74. The data communication is then extracted from the Ethernet link 64 by one of the second plurality of regional processors 58'(1), 58'(2), ..., 58'(n). In the second regional processor 58', the protocol of the data communication is switched (e.g., framed) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the E1/T1 trunk connection 52 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The protocol converted data communication is then output via the exchange system bus DL2 interface connections 62 and switch 42 for transmission over one of the E1/T1 trunk connections 52 to the other user. In this connection, the second regional processors 58' and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper one of the E1/T1 trunk connection 52 lines.

Reverse processes occur with respect to data communications received over the public switched telephone network and/or integrated services digital network 53 (concurrent with conventional voice communications) for switch 42 transmission to the users 46, 50 and 72. Thus, the Ethernet link 64 functions to concentrate the data communications received from the Internet 66 and the second regional processors 58'. The second regional processors 58' function to switch (e.g., de-frame) from the protocol required for transmission over E1/T1 trunk connection 52 (for example, point to point protocol (PPP)

-22-

or serial line Internet protocol (SLIP)) to the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)). Furthermore, the first regional processors 58 function to extract data communications from the Ethernet link 64, and switch (e.g., frame) from the protocol required for transmission over the Ethernet link 64 (for example, transmission control protocol/Internet protocol (TCP/IP)) to the protocol required for transmission over the plain old telephone service connection line 44 and integrated services digital network connection line 48 (for example, point to point protocol (PPP) or serial line Internet protocol (SLIP)). The first regional processors 58 and group switch/time switch 42 further perform a routing function in sending the data communications extracted from the Ethernet link 64 over the proper ones of the plain old telephone service connection lines 44, integrated services digital network connection lines 48, or asymmetric data subscriber line connection lines 70.

The foregoing concentration of data communications functionality may be better understood by reference to FIGURE 6 wherein there is shown a schematic diagram illustrating operation of the local exchange 40 in the handling of a plurality of data communications. Responsive to the transmission of data communications, and under the control of the switch control processor 54, the data packets 36 (graphically illustrated by tick marks on the communications lines) are routed from the switch 42 to the first regional processors 58. For plain old telephone service connection line 44 data transmissions, the data communications are first routed through the modem

-23-

pool 76. The first regional processors 58 perform any necessary protocol conversions (e.g., de-framing), and then output the data packets 36 to the Ethernet link 64 where they are concentrated with other data packets 36 received from other first regional processors and/or from the network terminal 74. Again under the control of the switch control processor 54, the second regional processors 58' then extract the data packets 36 from the Ethernet link 64 and perform any necessary protocol conversions (e.g., de-framing). The switch 42 then routes the packets onto selected ones of the E1/T1 trunk connections 52. Reverse operations occur with respect to data communications received by the local exchange 40 over the E1/T1 trunk connections 52.

FIGURE 6 illustrates, similarly to FIGURE 2, that with respect to the user data communications over the subscriber lines 44 and 48 that only a small amount of the reserved connect time for each data communication is used in actually transmitting data packets 36. As discussed above, this is not necessary a significant concern in view of similar waste on the trunk side of the switch. Unlike the operation illustrated in FIGURE 2, however, the concentration functionality implemented by the local exchange 40 results in a more efficient use of the E1/T1 trunk connections 52 where fewer individual lines are reserved and less unused (i.e., dead) time 38 between packet 36 transmissions is found.

One advantage provided by the local exchange 40 illustrated in FIGURES 3 and 6 is the consolidation of control and routing provided to the switch operator with respect to both voice and data communications. Thus, the

-24-

local exchange 40 provides all the functionality needed to serve user data traffic needs. The need for a separate Internet service provider, for example, is obviated. Another advantage provided by the local exchange 40 is robustness of operation resulting from the redundancy of using plural first and second regional processors 58 and 58' within the access server portion. The preferred architecture for this redundancy is the "one plus" concept where a spare first and second regional processor 58 and 58' are available in the event of a processor break-down. Another advantage provided by the local exchange 40 is its ability to concentrate the data traffic, and therefore to not overly bind (i.e., reserve) transport resources in the public switched telephone network and/or integrated services digital network 53 to the data traffic level. Thus, there need not necessarily be maintained a one-to-one mapping of connections between user communications lines 44 or 48 and the E1/T1 trunk connection 52 lines through the switch 42. Another benefit to the operator provided by the local exchange 40 is that the existing charging and billing system in place for handling conventional voice and data calls using reserved circuit connections can also be used to charge (in an integrated bill) for the concentrated data services provided in communicating over the E1/T1 trunk connection 52 lines and for providing users with Internet 66 access via the Ethernet link 64. Thus, users need not necessarily contract with a separate Internet service provider, or have to process a separate Internet service bill, as Internet access is provided directly through the local exchange 40. Alternatively, the operator utilizes the

-25-

local exchange 40 to concentrate user data traffic for transmission over the E1/T1 trunk connection 52 lines to an Internet service provider who pays the operator for the data concentration services provided by the exchange. Yet
5 another benefit of the incorporation of the access server functionality within the local exchange 40 is the availability of the telecommunications network operation and maintenance system (network) for use in maintaining the functionality of the access server. A further benefit
10 provided by the local exchange 40 is the supporting of both permanent and dial-up (i.e., non-permanent) data communications connections over the E1/T1 trunk connection 52 lines.

Although preferred embodiments of the method and
15 apparatus of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications
20 and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-26-

WHAT IS CLAIMED IS:

1. A packet data concentrating telecommunications switch, comprising:

5 a group switch/time switch for selectively interconnecting among and between a plurality of subscriber connection lines, a plurality of trunk connection lines and a plurality of regional processor interface lines;

10 a plurality of regional processors connected to the group switch/time switch over the corresponding plurality of regional processor interface lines; and

a local area network link connected to both the first and second plurality of regional processors;

15 wherein the plurality of regional processors function to convert packet data communications between a first format used for transmission over the subscriber connection lines and trunk connection lines and a second format used for transmission over the local area network link; and

20 wherein the local area network link functions to concentrate packet data communications received from certain ones of the plurality of regional processors via the group switch/time switch for concentrated output to certain other one or ones of the plurality of regional processors and back through the group switch/time switch.

25 2. The switch as in claim 1 wherein the plurality of subscriber connection lines comprise plain old telephone service (POTS) lines and integrated service
30 digital network (ISDN) lines.

-27-

3. The switch as in claim 1 wherein the plurality of trunk connection lines comprise E1/T1 trunk lines.

4. The switch as in claim 1 wherein the plurality of regional processor interface lines implement a DL2 interface connection.

5. The switch as in claim 1 wherein the local area network link comprises an ethernet link.

10

6. The switch as in claim 1 wherein the local area network link is connected to an Internet access point to allow concentrated data packet communication between the Internet and the switch to and from the plurality of regional processors.

15

7. The switch as in claim 1 further comprising:

a modem pool to modulate and demodulate packet data communications received from or sent to the plurality of subscriber connection lines; and

20

modem connection lines connecting the modem pool to the group switch/time switch wherein the group switch functions to interconnect among and between the modem connection lines, the plurality of subscriber connection lines, the plurality of trunk connection lines and the plurality of regional processor interface lines.

25

8. The switch as in claim 1 further comprising a network terminal providing asymmetric data subscriber line termination and an interface with the local area network

30

link and at least one of the plurality of subscriber connection lines.

5 9. A method for telecommunications switch operation to concentrate packet data communications, comprising the steps of:

receiving packet communications from a plurality of sources;

10 switching the received packet data communications from the plurality of sources to a first interface; and

concentrating the received and switched packet communications from the first interface onto a local area network link.

15 10. The method as in claim 9 further including the step of converting by the first interface between a first format of the received packet communications and a second format suitable for the local area network link.

20 11. The method as in claim 9 further including the steps of:

extracting the concentrated packet data communications from the local area network link to a second interface; and

25 switching the concentrated packet data communications extracted through the second interface to a destination.

30 12. The method as in claim 11 further including the step of converting by the second interface between a first format of the packet data communications and a second format suitable for the local area network link.

-29-

13. The method as in claim 9 further including the step of transmitting the concentrated packet data communications from the local area network link to an Internet access point to allow concentrated data packet communication between the plurality of sources and the Internet.

14. The method as in claim 9 further including the step of modulating/demodulating the packet communications from the plurality of sources.

15. In a telecommunications switch, comprising:
a group switch/time switch for selectively interconnecting among and between a plurality of subscriber connection lines, a plurality of trunk connection lines and a plurality of regional processor interface lines;

a plurality of regional processors connected to the group switch/time switch over the corresponding plurality of regional processor interface lines; and

a local area network link connected to both the first and second plurality of regional processors;

a method for operating the telecommunications switch to concentrate packet data communications, comprising the steps of:

receiving packet data communications from a plurality of sources over the subscriber connection lines;

switching the received packet data communications through the group switch/time switch to first ones of the plurality of regional processors; and

-30-

inserting for concentration by the first ones of the plurality of regional processors of the received and switched packet data communications onto the local area network link.

5

16. The method as in claim 15 further including the step of converting by the first ones of the plurality of regional processors of the packet data communications between a first format used for transmission over the subscriber connection lines and a second format used for transmission over the local area network link.

10

17. The method as in claim 15 further including the step of transmitting the concentrated packet data communications from the local area network link to an Internet access point to allow concentrated data packet communication transmission from the plurality of sources to the Internet.

15

18. The method as in claim 17 further including the step of performing reverses of the steps of claims 15 and 17 to allow concentrated data packet communication transmission from the Internet to the plurality of sources.

20

25

19. The method as in claim 15 further including the steps of:

extracting the concentrated packet data communications from the local area network link to at least one of second ones of the plurality of regional processors; and

30

switching the extracted concentrated packet data communications through the group switch/time switch onto one of the plurality of trunk connection lines to allow concentrated data packet communication transmission from the plurality of sources to the trunk connection lines.

20. The method as in claim 19 further including the step of converting by the second one of the plurality of regional processors of the packet data communications between a first format used for transmission over the trunk connection lines and a second format used for transmission over the local area network link.

21. The method as in claim 19 further including the step of performing reverses of the steps of claims 19 and 15 to allow concentrated data packet communication transmission from the trunk connection lines to the plurality of sources.

22. The method as in claim 15 wherein the telecommunications switch further comprises a modem pool, and the method further comprises the step of modulating/demodulating packet data communications received from or sent to the plurality of subscriber connection lines.

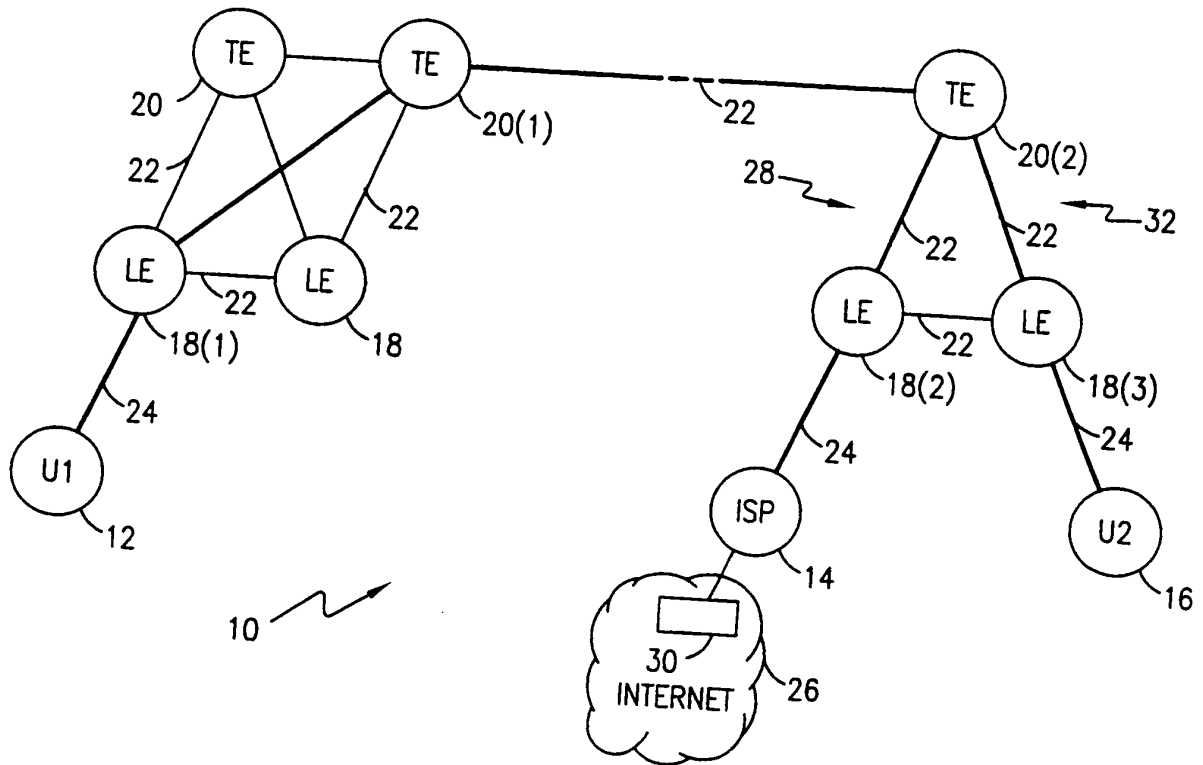


FIG. 1

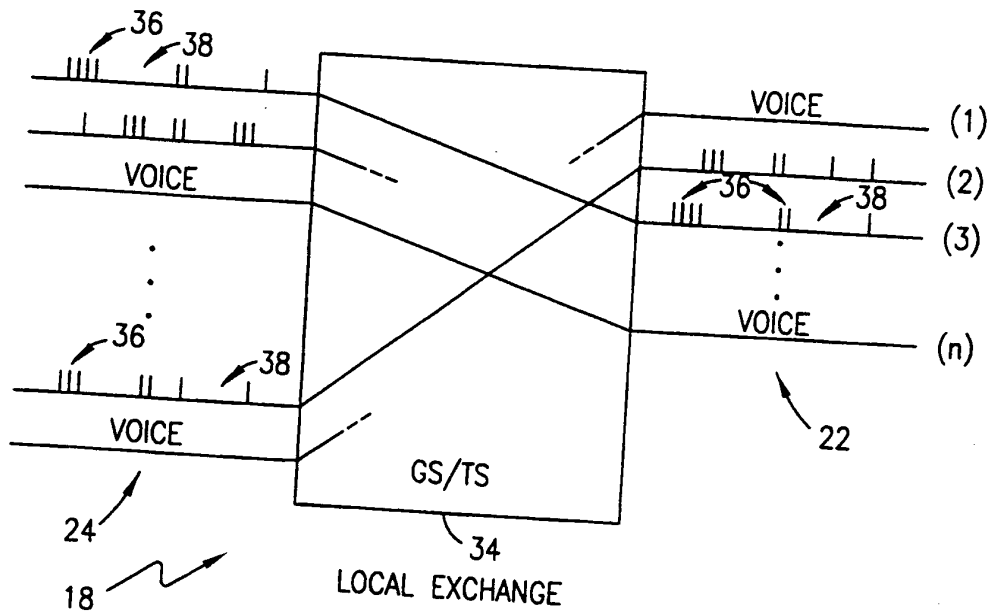
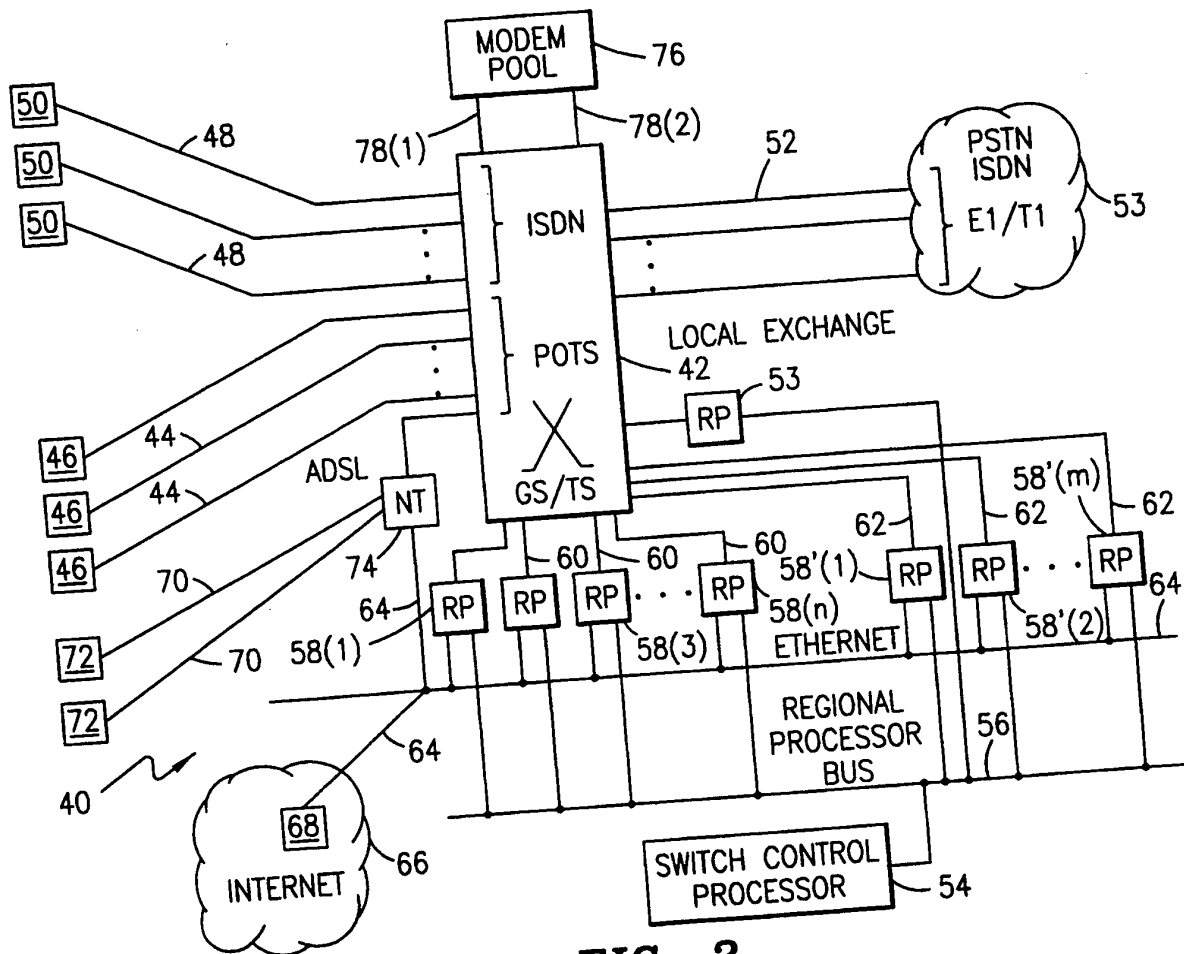
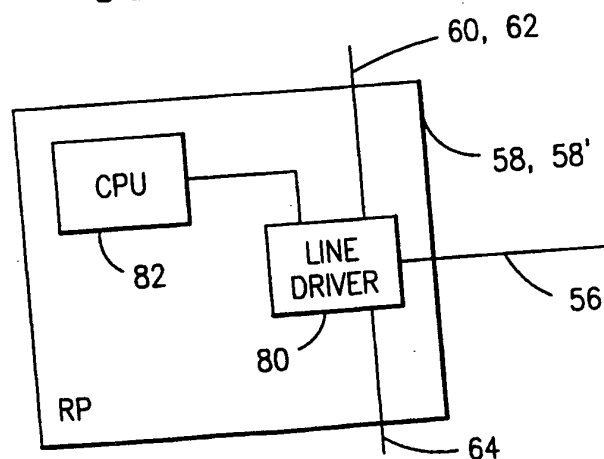


FIG. 2

**FIG. 3****FIG. 4**

SUBSTITUTE SHEET (RULE 26)

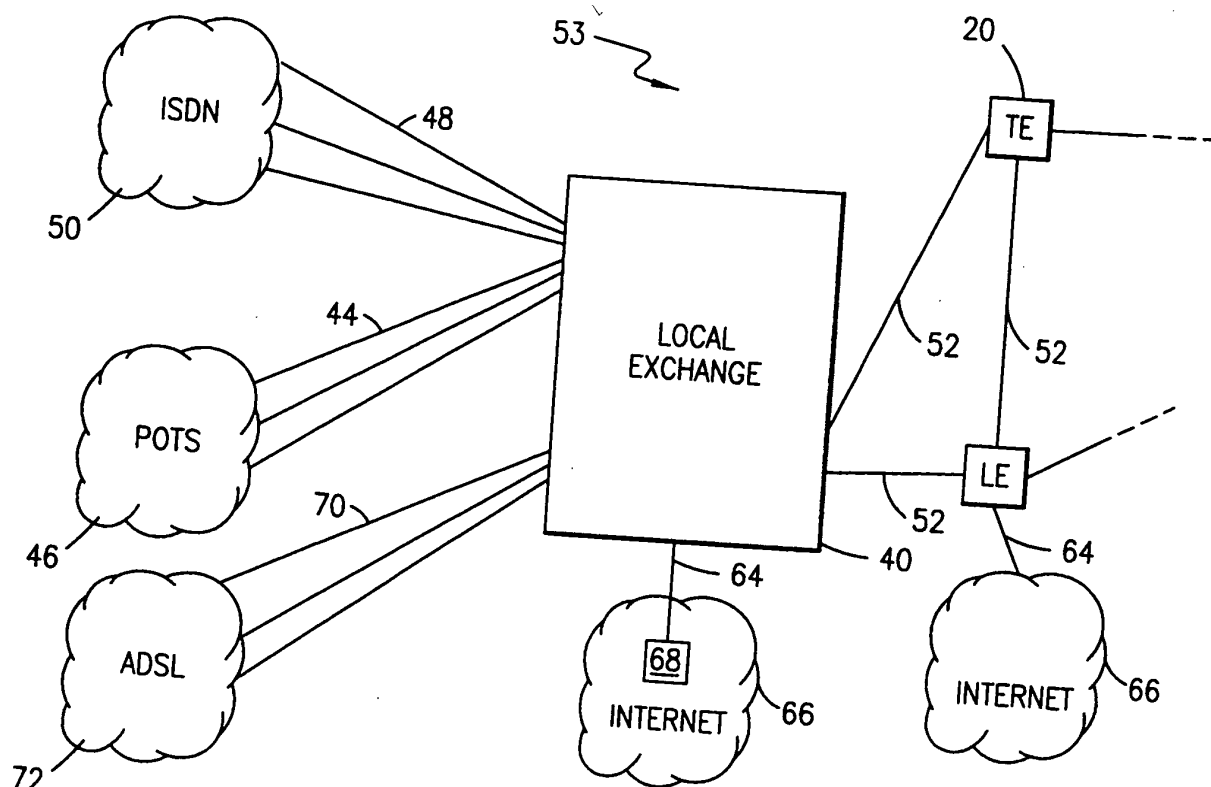


FIG. 5

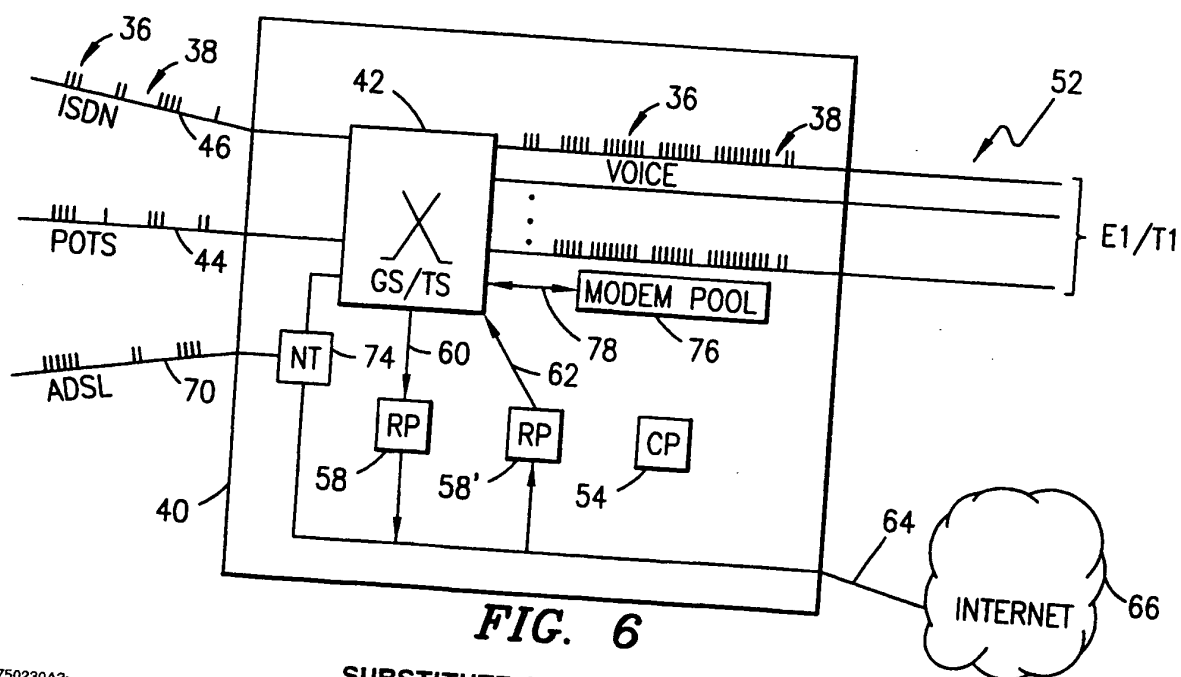


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/10987

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04M3/00 H04Q11/04 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 312 628 A (IBM) 26 April 1989 see abstract see column 4, line 51 - column 5, line 47 see figures 1,5,6 ---	1,2, 9-12,15, 16,19-21
X	EP 0 664 658 A (AT & T CORP) 26 July 1995 see column 4, line 25 - line 57 see column 7, line 21 - column 9, line 28 see figure 2 ---	1,9,15
Y	PATENT ABSTRACTS OF JAPAN vol. 010, no. 184 (E-415), 27 June 1986 & JP 61 030148 A (NEC CORP), 12 February 1986, see abstract --- -/--	1-3,9, 14,15



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 December 1997

Date of mailing of the international search report

18/12/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Megalou, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/10987

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 018, no. 635 (E-1638), 5 December 1994 & JP 06 245243 A (HITACHI TELECOM TECHNOL LTD), 2 September 1994, see abstract	1-3, 9, 14, 15
P, X	----- PATENT ABSTRACTS OF JAPAN vol. 097, no. 002, 28 February 1997 & JP 08 265884 A (OKI ELECTRIC IND CO LTD), 11 October 1996, see abstract	1, 9, 10, 15, 16
E	----- US 5 668 857 A (MCHALE JOHN F) 16 September 1997 see the whole document	1-22
A	----- EP 0 194 491 A (INT STANDARD ELECTRIC CORP) 17 September 1986 see abstract; figure 1 -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/10987

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0312628 A	26-04-89	DE 3788649 D	10-02-94
		DE 3788649 T	23-06-94
		JP 1123548 A	16-05-89
		SG 173494 A	28-04-95
		US 5008878 A	16-04-91
EP 0664658 A	26-07-95	US 5434854 A	18-07-95
		CA 2118440 A	28-06-95
		CN 1126928 A	17-07-96
		JP 7212401 A	11-08-95
US 5668857 A	16-09-97	WO 9737458 A	09-10-97
EP 0194491 A	17-09-86	AU 579224 B	17-11-88
		AU 5344586 A	28-08-86
		CN 1003154 B	25-01-89
		JP 2101550 C	22-10-96
		JP 7108004 B	15-11-95
		JP 61196653 A	30-08-86
		US 4789981 A	06-12-88

THIS PAGE BLANK (USPTO)